




## ARG 130 MOBIL




1730  
x 13  
x  
0,65

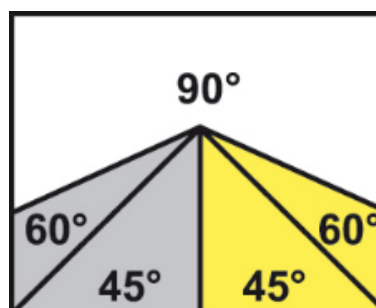

**Lighter version of ARG 130 designed for work on construction sites and installations. In order to minimize the total weight the arm, base plate and table are made of cast aluminium. To achieve the maximum service life the vice and wheels of the saw band are made of grey cast iron. To allow for easy transport the machine is equipped with an arm lock in low position, travelling wheels and a handle. Saw**



**band feed into cut, arm  
uplift and material  
clamping are carried out  
manually.**



---

Category: [Manuelles](#)

## GALLERY IMAGES



## PRODUCT DESCRIPTION

- Modern concept of the band saw arm allows for large cutting ranges in upright and angular cuts.
- Continuous adjustment of the cutting angle within the range 90°-60° when the workpiece is clamped tight.
- Simple locking and adjusting of the desired cutting angle on the angle scale.



- Maximum cutting accuracy and saw band service life in this category of band saws.
- High-precision three-side hardmetal band saw guidance.
- Manufactured bearing of running wheels, tensioning wheel system and all rotary parts are the same as in big professional machines.
- Professional, noiseless and maintenance-free band drive is provided by an industrial electric motor with worm gearbox.  
Single-phase, single-speed 230 V motor.
- The machine is equipped with a 250 mm workpiece stop.

#### Folding base U 130

Allows for machine installation at ergonomic height. Travelling wheels facilitate machine transport on the base both in its folded and unfolded positions.




|   | <b>90°</b> | <b>+45°</b> | <b>+60°</b> |
|---|------------|-------------|-------------|
| ● | 130        | 115         | 70          |
| ■ | 130        | 105         | 60          |
| ■ | 180 x 100  | 115 x 75    | 70 x 60     |

|                           |                       |
|---------------------------|-----------------------|
| Main motor                | 230 V, 50 Hz, 0,55 kW |
| Saw blade speed           | 75 m/min.             |
| Machine dimensions (min.) | 980 x 420 x 550 m     |
| Machine dimensions (max.) | 1030 x 840 x 810 mm   |
| Machine weight            | 50 kg                 |

Convoyeurs disponibles:





Constructeur français  
de moyens de  
trouçonnage standards  
et spéciaux.

## FICHE TECHNIQUE

ARG 130 MOBIL

<https://www.coup-indus.fr/produit/arg-130-mobil/>



### **Workpiece stop - Standard equipment**

Simple stop for setting the required length of the material to be cut.