



ARG 130 SUPER

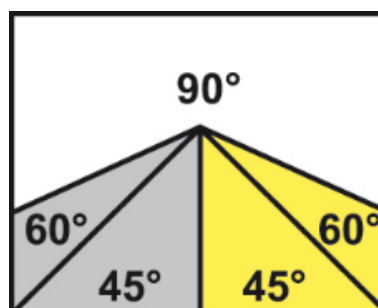

A universal band saw is appraised for general use in various workshops (work on locks, maintenance), at plants with machinery and in field installations. Robust framework of the machine is made of grey cast iron. In contrast to the basic version ARG 130, the feed into cut is performed by the weight of the arm with the possibility of regulating the feed rate by a special system of springs. When the cut is finished



Constructeur français
de moyens de
trouçonnage standards
et spéciaux.

FICHE TECHNIQUE

ARG 130 SUPER



<https://www.coup-indus.fr/produit/arg-130-super/>

the band saw drive automatically switches off. For fast cutting of small cross-sections the system of springs can be set for manual feed into cut as well. Mechanical lock of the upper position of the band arm. Arm uplift is carried out manually.




Category: [Manuelles](#)

GALLERY IMAGES

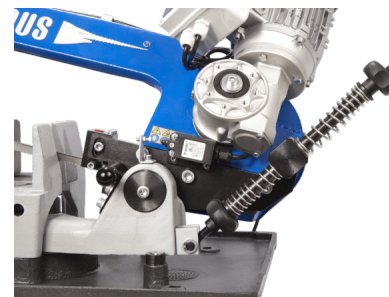

PRODUCT DESCRIPTION

- Modern concept of the band saw arm allows for large cutting ranges in upright and angular cuts.
- Continuous adjustment of the cutting angle within the range 90°-60° when the workpiece is clamped tight.
- Simple locking and adjusting of the desired cutting angle on the angle scale.
- Maximum cutting accuracy and saw band service life in this category of band saws.
- High-precision three-side hardmetal band saw guidance.
- Manufactured bearing of running wheels, tensioning wheel system and all rotary parts are the same as in big professional machines.
- Professional, noiseless and maintenance-free band drive is provided by an industrial



electric motor with worm gearbox.

- The machine can be equipped with two types of motors. Single-phase motor (230 V) with universal saw band speed of 75 m/min. facilitates easy mains connection. Three-phase two-speed motor (400 V) with saw band speed of 40 and 80 m/min. is suitable for frequent cutting of full sections and thick-walled sections.
- The machine is equipped with a 250 mm workpiece stop.

ARG 130 super band saws are manufactured in the following versions:

ARG 130 super


Bench band saw without cooling.

ARG 130 super TK

Bench band saw with cooling. The machine is connected to a complete cooling system with a professional high-performance pump and possibility of regulating the flow on both guiding heads.

ARG 130 super K


Band saw with a base and cooling. The machine is connected to a complete cooling system with a professional high-performance pump and possibility of regulating the flow on both guiding heads. Coolant tank is placed in the base of the machine. This version allows you to install conveyors both before and after the cut.




| | 90° | +45° | +60° |
|---|-----------|----------|---------|
| ● | 130 | 115 | 70 |
| ■ | 130 | 105 | 60 |
| ■ | 180 x 100 | 115 x 75 | 70 x 60 |

| | |
|---------------------------------|--|
| Main motor | 230 V, 50 Hz, 0,55 kW / 400 V, 50 Hz, 0,37/0,55 kW |
| Pump motor | 230 V, 50 Hz, 0,065 kW / 400 V, 50 Hz, 0,05 kW |
| Saw blade speed | 75 m/min. / 40/80 m/min. |
| Working height vice (with base) | 900 mm |
| Coolant tank | cca 15 l |
| Machine dimensions (min.) | 980 x 420 x 550 mm |
| Machine dimensions (max.) | 1030 x 840 x 1540 mm |
| Machine weight | 70 / 77 / 100 kg |

Convoyeurs disponibles:

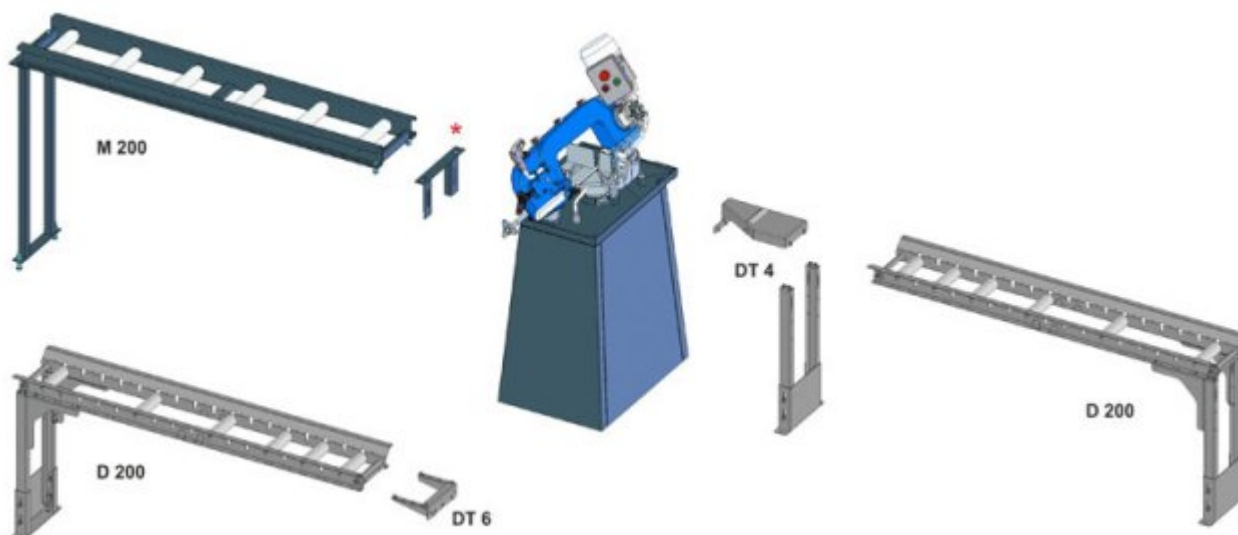



Constructeur français
de moyens de
trouçonnage standards
et spéciaux.

FICHE TECHNIQUE

ARG 130 SUPER

<https://www.coup-indus.fr/produit/arg-130-super/>



Workpiece stop - Standard equipment

Simple stop for setting the required length of the material to be cut.