

Constructeur français
de moyens de
trouçonnage standards
et spéciaux.


FICHE TECHNIQUE

ARG 130 SUPER

<https://www.coup-indus.fr/produit/arg-130-super/>




ARG 130 SUPER

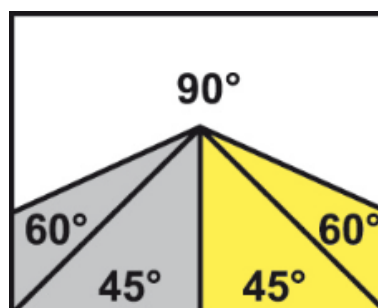

A universal band saw is appraised for general use in various workshops (work on locks, maintenance), at plants with machinery and in field installations.

Robust framework of the machine is made of grey cast iron. In contrast to the basic version ARG 130, the feed into cut is performed by the weight of the arm with the possibility of regulating the feed rate by a special system of springs. When the cut is finished



Constructeur français
de moyens de
trouçonnage standards
et spéciaux.

FICHE TECHNIQUE

ARG 130 SUPER


<https://www.coup-indus.fr/produit/arg-130-super/>

**the band saw drive
automatically switches off.
For fast cutting of small
cross-sections the system
of springs can be set for
manual feed into cut as
well. Mechanical lock of the
upper position of the band
arm. Arm uplift is carried
out manually.**



Category: [Manuelles](#)

GALLERY IMAGES




Constructeur français
de moyens de
trouçonnage standards
et spéciaux.

FICHE TECHNIQUE


ARG 130 SUPER

<https://www.coup-indus.fr/produit/arg-130-super/>

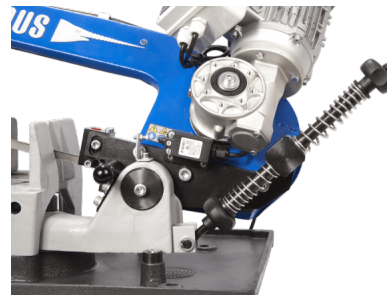

PRODUCT DESCRIPTION

- Modern concept of the band saw arm allows for large cutting ranges in upright and angular cuts.
- Continuous adjustment of the cutting angle within the range 90°-60° when the workpiece is clamped tight.
- Simple locking and adjusting of the desired cutting angle on the angle scale.
- Maximum cutting accuracy and saw band service life in this category of band saws.
- High-precision three-side hardmetal band saw guidance.
- Manufactured bearing of running wheels, tensioning wheel system and all rotary parts are the same as in big professional machines.
- Professional, noiseless and maintenance-free band drive is provided by an industrial



electric motor with worm gearbox.

- The machine can be equipped with two types of motors. Single-phase motor (230 V) with universal saw band speed of 75 m/min. facilitates easy mains connection. Three-phase two-speed motor (400 V) with saw band speed of 40 and 80 m/min. is suitable for frequent cutting of full sections and thick-walled sections.
- The machine is equipped with a 250 mm workpiece stop.

ARG 130 super band saws are manufactured in the following versions:

ARG 130 super


Bench band saw without cooling.

ARG 130 super TK

Bench band saw with cooling. The machine is connected to a complete cooling system with a professional high-performance pump and possibility of regulating the flow on both guiding heads.

ARG 130 super K

Band saw with a base and cooling. The machine is connected to a complete cooling system with a professional high-performance pump and possibility of regulating the flow on both guiding heads. Coolant tank is placed in the base of the machine. This version allows you to install conveyors both before and after the cut.



Constructeur français
de moyens de
trouçonnage standards
et spéciaux.

FICHE TECHNIQUE


ARG 130 SUPER


<https://www.coup-indus.fr/produit/arg-130-super/>

	90°	+45°	+60°
●	130	115	70
■	130	105	60
■	180 x 100	115 x 75	70 x 60

Main motor	230 V, 50 Hz, 0,55 kW / 400 V, 50 Hz, 0,37/0,55 kW
Pump motor	230 V, 50 Hz, 0,065 kW / 400 V, 50 Hz, 0,05 kW
Saw blade speed	75 m/min. / 40/80 m/min.
Working height vice (with base)	900 mm
Coolant tank	cca 15 l
Machine dimensions (min.)	980 x 420 x 550 mm
Machine dimensions (max.)	1030 x 840 x 1540 mm
Machine weight	70 / 77 / 100 kg

Convoyeurs disponibles:

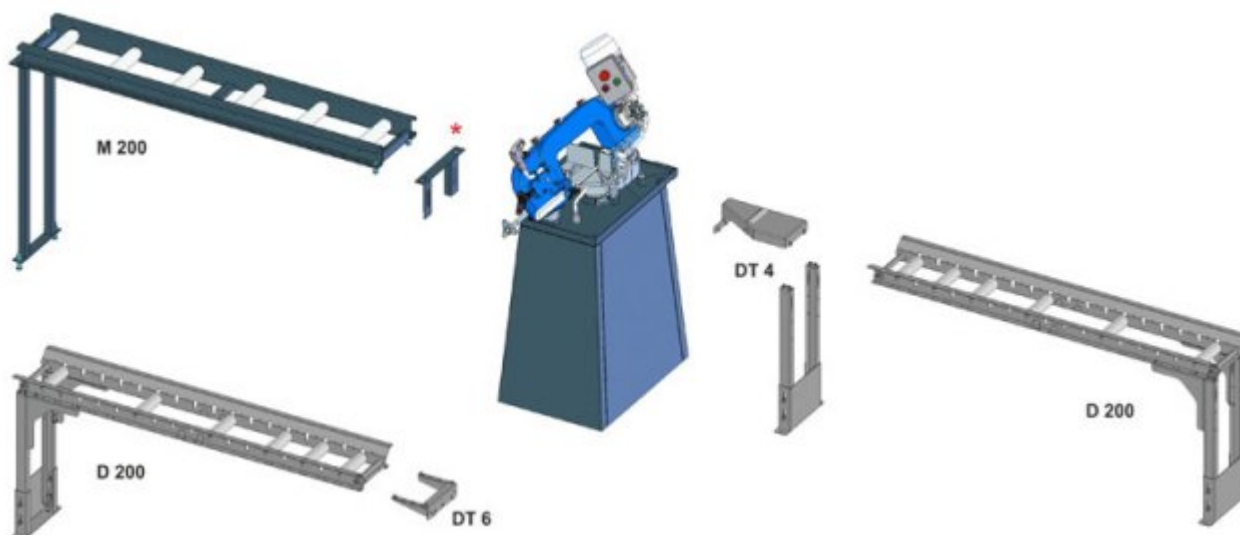



Constructeur français
de moyens de
trouçonnage standards
et spéciaux.

FICHE TECHNIQUE

ARG 130 SUPER

<https://www.coup-indus.fr/produit/arg-130-super/>



Workpiece stop - Standard equipment

Simple stop for setting the required length of the material to be cut.