



Constructeur français
de moyens de
trouçonnage standards
et spéciaux.


FICHE TECHNIQUE

ARG 640 DCT S.A.F.

<https://www.coup-indus.fr/produit/arg-640-dct-s-a-f/>



ARG 640 DCT S.A.F.

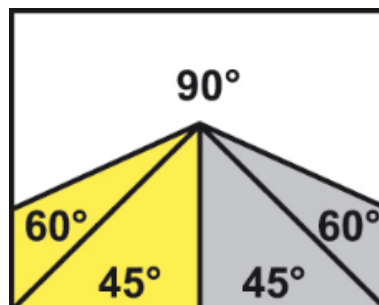

Powerful band saw with a massive dual-column support of the saw band arm which moves on linear guidance. That ensures excellent stiffness of the whole system and precise cutting. The modern conception of a massive band saw arm allows for industrial cutting of full materials of large sections, cutting of very large sections and also for cutting under 60°. The robust industrial band saw



is generally suitable for all demanding production plants. The saw band sized 54 x 1.6 mm ensures accurate cutting of large cross-sections. The band is manufactured in many versions and allows for cutting of wide range of materials, including stainless steel or tool steel. Thanks to an exceptionally robust base, the system of rotary dual-column arm support and remarkably large loading surface of the vice the machine excels in its category. All of this ensures unique stability, accuracy and service life.



Category: [Double colonnes semi auto](#)

PRODUCT DESCRIPTION

Easy intuitive controls through an ergonomic rotary central panel. When you switch to the



manual mode you can control all functions separately. The machine is equipped with a high-performance industrial hydraulic unit which allows setting of the contact pressure of the vice. All of this in connection with hydraulics-controlled saw band feed into cut significantly increases cutting efficiency, especially in larger series and cutting of full and high-quality materials. Both saw band guiding heads are fitted with automatic regulation of feed into cut, which significantly increases the rate and accuracy of cutting and service life of the saw band. Pressing a single switch will execute complete cutting cycle – material clamping, band and cooling system start, cutting, band and cooling stop, arm uplift to the original adjustable position and vice unclamping. Hydraulic unit allows you to set the required pressure of the vice. Maximum cutting efficiency is maintained also thanks to the possibility of setting optimum saw band rate by a frequency converter in the range between 15 and 90 m/min., which significantly contributes to cutting accuracy and service life of saw bands.

Plenty of accessories in the basic version:

- Double-sided automatic regulation of saw band feed into cut according to the resistance of the material to be cut.
- Hydraulic feed of saw band guide according to the cross-section of the material to be cut is controlled from the central panel.
- Hydraulic saw band tensioning controlled from the central panel ensures optimum tension and control of it during the operation of the machine. Optimum tensioning of the saw band is essential for its service life and cutting accuracy.
- Electrically driven cleaning brush for the saw band.
- Automatic removal of chips by a screw conveyor.
- Rinse spray gun.
- The system is mounted on tapered roller bearings in order to facilitate the easiest possible rotation of the arm during angular cutting.
- Simple locking and adjusting of a required cutting angle on the angle scale or, as additional accessories, digital monitoring on a touch screen.
- Massive full uplift vice ensures easy, quick and reliable material clamping.
- Large diameter running wheels and precise three-side hardmetal guiding ensure long service life of the band and cutting accuracy.
- Overdesign of running wheel bearings, tensioning wheel system and all rotary parts ensures long service life of the machine.



- Noiseless and maintenance-free band drive is provided by an industrial electric motor with worm gearbox.
- The machine is connected to a complete cooling system with a professional pump and possibility of regulating the flow on both guiding heads independently, on an additional adjustable outlet and on a rinse spray gun. Coolant tank with a pump is placed in the base of the machine.
- The machine checks correct tension or break of the saw band. If the saw band breaks the machine automatically switches off.
- Easy control by ergonomically placed controls (electrical and hydraulics) on a rotary panel.



	90°	-45°	-60°
	640	640	375
	550	550	375
	1100 x 550	710 x 550	375 x 550

Main motor	400 V, 50 Hz, 7,5 kW
Pump motor	400 V, 50 Hz, 0,12 kW
Hydraulic motor unit	400 V, 50 Hz, 1,1 kW
Saw blade speed	20-90 m/min.
Working height of vice	800 mm
Hydraulic system oil	cca 25 l (ISO 6743/4-HM, DIN 51 524 part 2-HLP)
Coolant tank	cca 100 l
Machine dimensions (min.)	3800 x 2500 x 2050 mm
Machine dimensions (max.)	3800 x 2700 x 2700 mm
Machine weight	4300 kg

Convoyeurs disponibles:




Constructeur français
de moyens de
trouçonnage standards
et spéciaux.

FICHE TECHNIQUE

ARG 640 DCT S.A.F.

<https://www.coup-indus.fr/produit/arg-640-dct-s-a-f/>

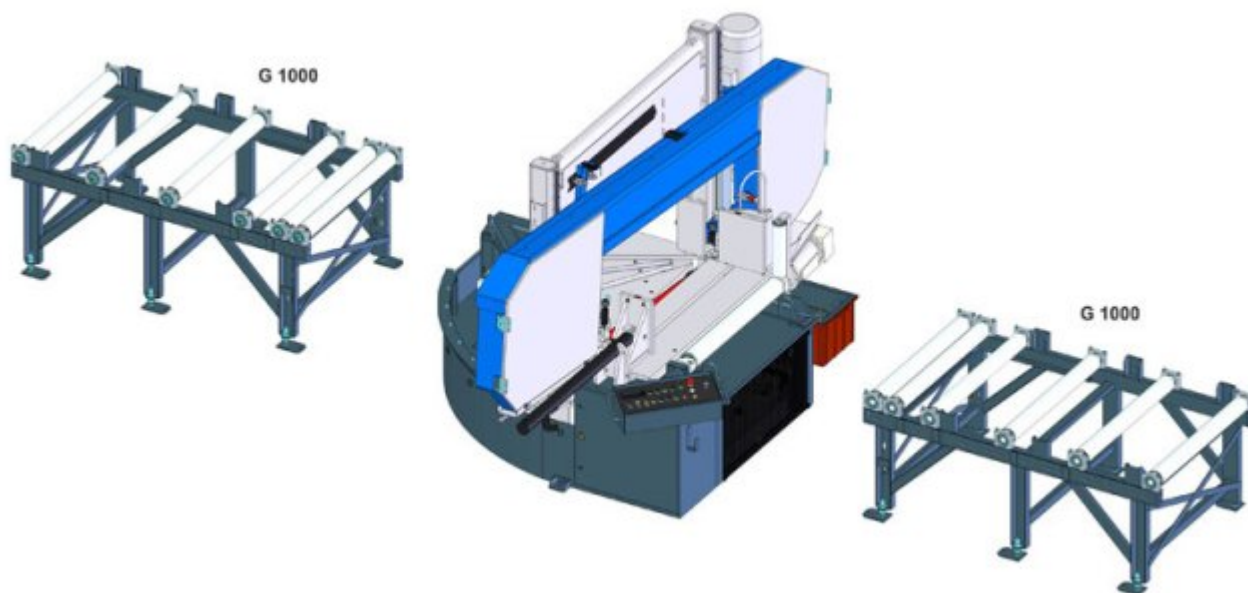

Frequency converter - Standard equipment

Enables continuous blade speed regulation between 15-90 m/min. and thus setting the optimum cutting conditions for the given material.




Electrical cleaning brush - Standard equipment

Steel circular brush powered by an industrial motor with worm gearbox. Used to remove chips from the saw band behind the cut.




Pressure regulation - Standard equipment

Hydraulically controlled double-side automatic regulation of saw band feed into cut according to the resistance of the material to be cut. Significantly reduces the cutting time and service life of the saw band.



Hydraulic tensioning - Standard equipment

Ensures convenient tensioning of the saw band via the central control panel. Optimum tensioning of the saw band is essential for its service life and cutting accuracy.



Screw chips conveyor - Standard equipment

Ensures smooth removal of chips from the machine. Reduces the time needed for the cleaning of the machine especially when cutting series of full materials producing large amount of chips.



Rinse spray gun - Standard equipment

For cleaning working space of the machine.



Hydraulic pressure device

Used to clamp bundles of material to be cut. Ensures reliable clamping by hydraulically controlled vertical contact pressure working within the machine's cycle.



Halogen lamp

Provides good lighting of the workplace of the machine. An invaluable tool especially when the lighting at the workplace is insufficient.



Oil mist lubrication

Creates an oil mist that is sprayed onto the cutting edge. It replaces the use of a classic coolant, especially when cutting sections during which leakages may occur. Possibility of using organic oils.



Laser alignment

High-quality industrial laser projects the cutting line on the material to be cut. Makes the setting of the required material length simpler, faster and more accurate.



Display of angles

Digital scanning and display of set cutting angles ensures fast and accurate setting of the required angle. The value is displayed on a clear, ergonomically placed display. We recommend this equipment especially for angular cutting.



Chip container

For easy handling is chip container equipped with wheels and swivel chip bin.